





1

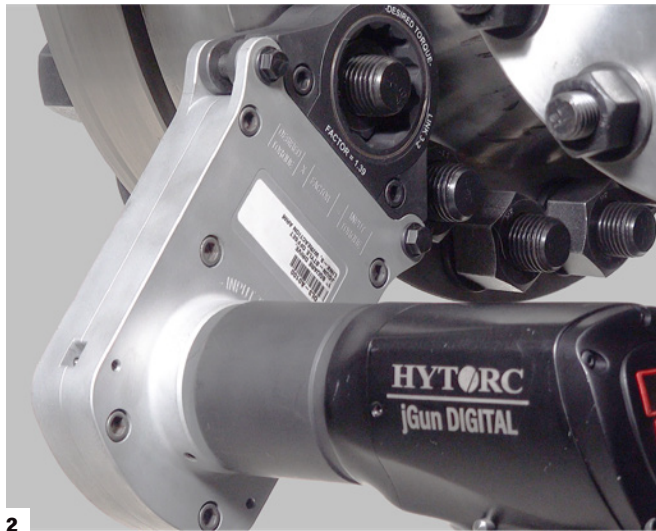

2

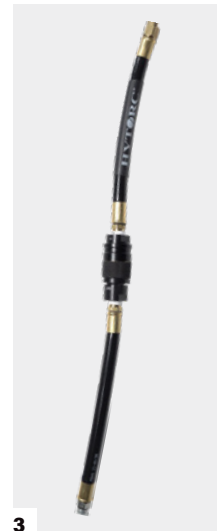

3

jGun® DIGITAL Single Speed Pneumatic Torque Tool - Accessories

1. WEATHER COVER

The Weather Cover for the **jGun DIGITAL Single Speed Tool** protects the display during heavy use in the field, no matter the conditions. The smooth, nonstick silicone material is ideal to repel water while providing excellent resistance to ozone and UV light. The cover can be easily installed over the tool and digital display to allow for safe and reliable operation under all kinds of weather. The cover allows clearance so that the Tool may be recharged even with the Weather Cover installed. The Cover is available in two sizes that fit the **jGun DIGITAL Single Speed Tool** small and large size handles.

MODEL COMPATIBILITY

jGUN-D.25 to jGUN-D1
Part Number: **D.25-PC1**

jGUN-D2 to jGUN-D8
Part Number: **D2-PC1**

2. OFFSET LINK

The Offset Link provides an extension for the **jGun DIGITAL Single Speed Tool** allowing operators to tighten bolts that are difficult or impossible to reach with limited overhead clearance or nearby obstructions. The Offset Link provides interchangeable cartridges that allow links to be quickly interchanged in the field to fit different size nuts. The Offset Link delivers accurate torque from the square driver tool to the fastener to minimize operator error and improve safety. The Offset links come in two basic drive types compatible with either $\frac{3}{4}$ " and 1" square drives. The Offset Link is compatible with **HYTORC Washer** which eliminates bending and side load while increasing the safety and speed of all bolting operations.

MODEL COMPATIBILITY

jGUN-D.25 to jGUN-D3

3. WHIP HOSE WITH AIR REGULATOR

The flexible whip-hose provides an in-line air regulator with locking mechanism to increase the flexibility of the **jGun DIGITAL Single Speed Tool** without the need for conventional Filter Regulator Lubricator (FRL) System. The field-proven mechanism allows the regulator to be set to the desired torque while locking it in place until the next torque adjustment. The hose is constructed from a rugged and flame-resistant polyurethane material providing excellent abrasion resistance and increased flexibility. The 25" whip hose is rated for maximum working pressure of 140 PSI.

NOTE: jGun DIGITAL Single Speed Tool calibration is required after installing the whip hose. Please contact HYTORC Calibration Services.

MODEL COMPATIBILITY

jGUN-D.25 to jGUN-D8
Part Number: **A001162**

HYTORC owns all content, copyrights, trademarks and patents in this document. © 2021 HYTORC. Any unauthorized use or distribution of any material from this document is strictly prohibited.

HYTORC

Headquarters:
333 Route 17 N., Mahwah, NJ 07430
+1-201-512-9500

Email:
info@hytorc.com

Phone:
1-800-FOR-HYTORC

Online:
hytorc.com